




## 接口卡的扩展 Interface extension

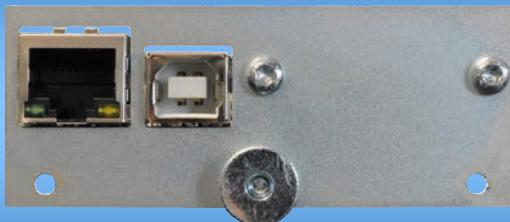

- 可拆装、安装简单（即插即用）
- 经产品设置菜单配置简单
- 有三种配件可选
  - IF-KE5 USB (1个USB端口)
  - IF-KE5 USB/LAN (1x USB + 1x Ethernet)
  - IF-KE5 USB/ANALOG (1x USB + 1x Analog)
- 与下面系列兼容
  - EA-PS 3000 C
  - EA-EL 3000 B

- Retrofittable, simple installation (plug 'n play)
- Easy configuration via a setup menu on the device
- Three choices to select from
  - IF-KE5 USB (1x USB)
  - IF-KE5 USB/LAN (1x USB + 1x Ethernet)
  - IF-KE5 USB/ANALOG (1x USB + 1x Analog)
- Compatible to series
  - EA-PS 3000 C
  - EA-EL 3000 B

可选拆装式接口模块IF-KE5可以装入EA-EL 3000 B与EA-PS 3000 B系列产品上，从而增加了一个或两个数字端口，或者一个模拟端口。

该模拟端口 (Sub-D, 15针) 接有一个USB，相当于USB+LAN的组合。USB+模拟端口组合让用户可以进行数字式或模拟式的远程控制。

所有这三种型号都含一个USB，不仅可以通过SCPI或ModBus命令进行数字式远程控制，还能用于固件更新。

### 技术资料:

- 尺寸 (宽x高x深): 76 x 30 x 95 mm
- 总重: 200 g
- 端子:
  - 1x RJ 45 (仅针对 IF-KE USB/LAN)
  - 1x B型USB
  - 1x15针 Sub-D (仅针对IF-KE5 USB/ANALOG)
- 与产品电隔离，耐压为: 最高1500 V DC
- IF-KE5 USB订购编号: 33 100 232
- IF-KE5 USBLAN订购编号: 33 100 233
- IF-KE5 USBANALOG订购编号: 33 100 234

The optionally available and retrofittable interface modules IF-KE5 can be installed in the series EA-EL 3000 B and EA-PS 3000 B, adding one or two digital ports or also an analog port.

The analog port (sub-d, 15 pole) is coupled with an USB, such as with the combination of USB + LAN. The USB plus analog combination offers the possibility for the user either use digital or analog remote control.

The USB, which is included in all three variants, is not only used for digital remote control via SCPI or ModBus command, it also serves for firmware updates.

### Technical specifications:

- Dimensions (WxHxD): 76 x 30 x 95 mm
- Total weight: 200 g
- Connectors:
  - 1x RJ 45 (IF-KE USB/LAN only)
  - 1x USB Type B
  - 1x Sub-D, 15 pole (IF-KE5 USB/ANALOG only)
- Galvanic isolation to the device: max. 1500 V DC
- Ordering number IF-KE5 USB: 33 100 232
- Ordering number IF-KE5 USBLAN: 33 100 233
- Ordering number IF-KE5 USBANALOG: 33 100 234